

AlGaInP Visible Laser Diode

ADL-66503TL

6-2D-LD66-004_Rev.00

★660nm 50mW 60°C

Reliable High Power Operation

•Features

1. Highly reliable / COD free
2. Higher power
3. High efficiency

•Applications

1. High power Laser modules
2. Industrial laser markers / measuring instruments
3. Medical applications

•Absolute maximum ratings


Parameter	Symbol	Condition	Rating	Unit
Light output power	P_O	CW	52	mW
Reverse voltage (LD)	V_{RL}	-	2	V
Reverse voltage (PD)	V_{RD}	-	30	V
Forward current (PD)	I_{FD}	-	10	mA
Case temperature	T_C	-	-10~+60	°C
Storage temperature	T_S	-	-40~+85	°C

•Electrical and optical characteristics ($T_c=25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Peak wavelength	λ	650	658	665	nm	$P_O=50\text{mW CW}$ Kink free
Threshold current	I_{th}	-	45	60	mA	
Operating current	I_{op}	-	90	120	mA	
Operating voltage	V_{op}	2.0	2.5	3.0	V	$P_O=45\sim 50\text{mW}$
Differential efficiency	η	0.7	1.0	1.4	mW/mA	
Monitor current	I_m	0.05	0.25	0.5	mA	$P_O=50\text{mW}, V_{RD}=5\text{V}$
Parallel divergence angle	$\theta_{\parallel}$	6.0	8.5	12.0	deg	$P_O=50\text{mW}$
Perpendicular divergence angle	$\theta_{\perp}$	14	17	22	deg	
Parallel FFP deviation angle	$\Delta\theta_{\parallel}$	-3	0	+3	deg	
Perpendicular FFP deviation angle	$\Delta\theta_{\perp}$	-3	0	+3	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	um	

•Precautions







- * Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- * Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- * Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- * Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- * No laser device should be used in any application or situation where life or property is at risk in event of device failure.
- * Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product

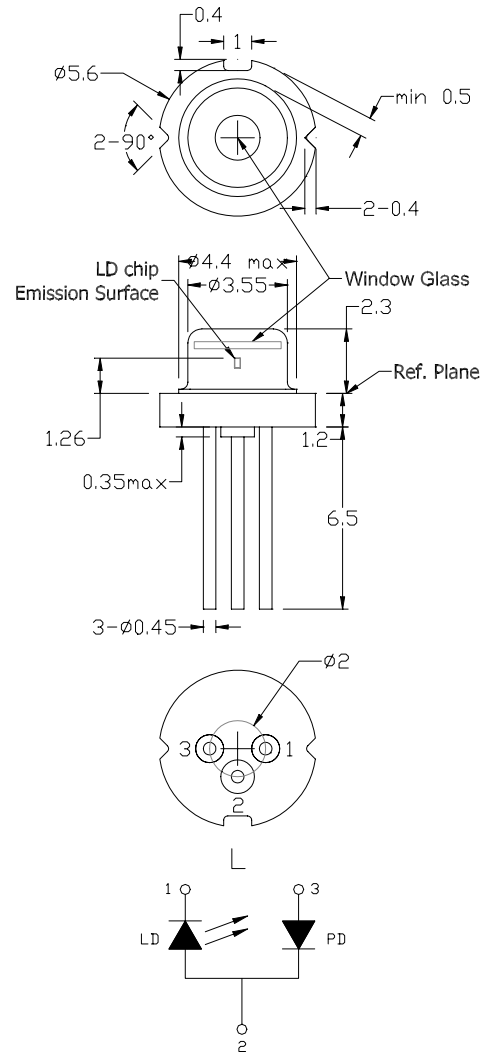

AlGaInP Visible Laser Diode

ADL-66503TL

6-2D-LD66-004_Rev.00

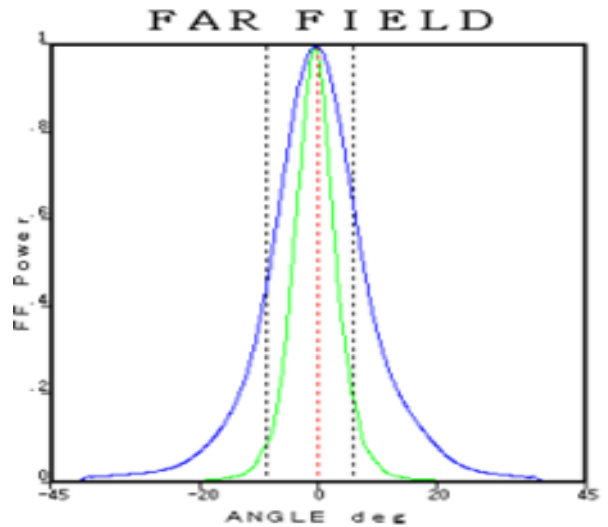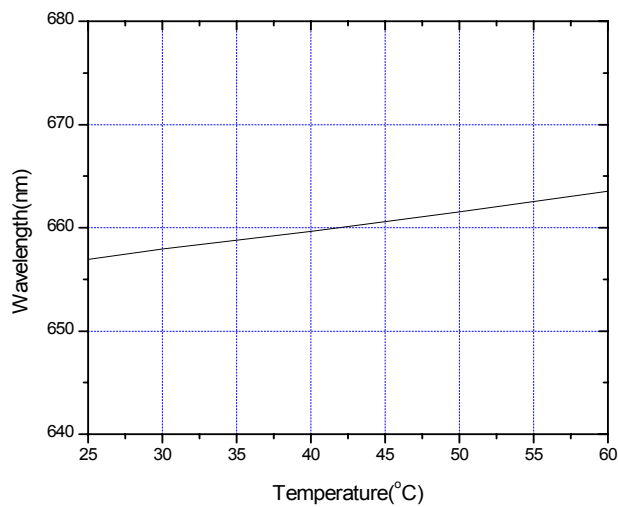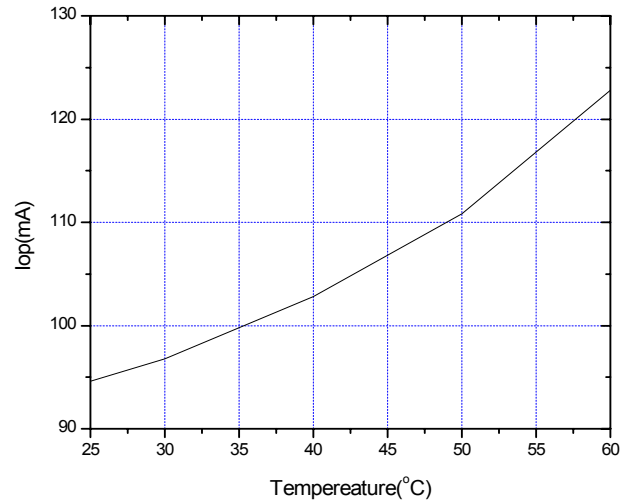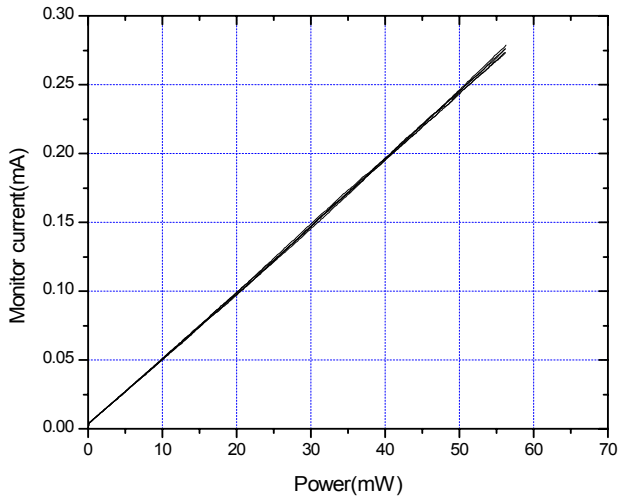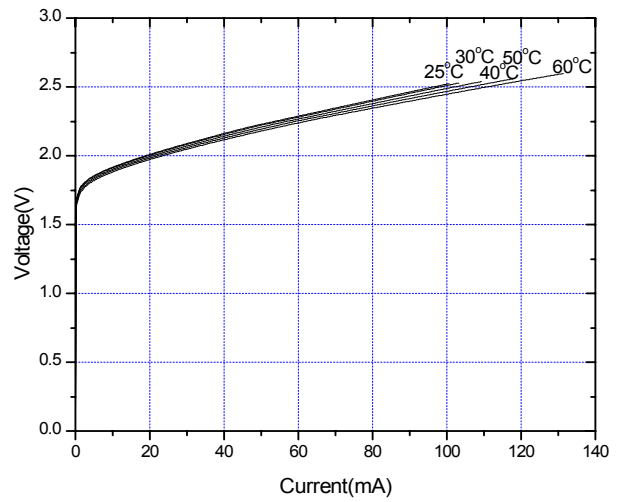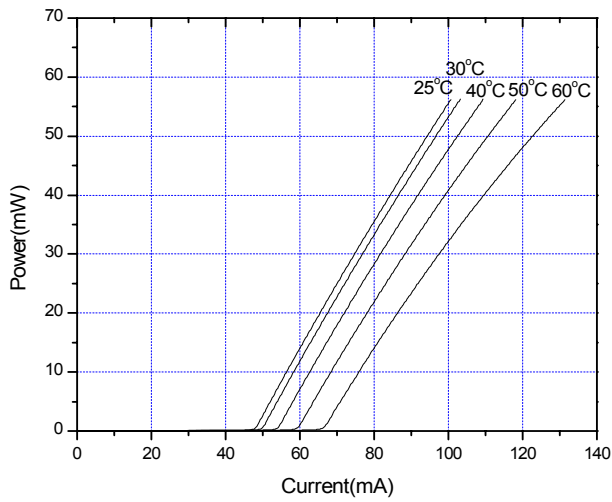

* For reference only. Contents above are subject to change without notice.

Arima
LASERS