

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

Compact Pulsed Fiber Laser Module

1 W average power
1ns, 100kHz-1MHz, 11kW, 1550nm
With monitor port

(not wavelength stabilized)

1 Document History

Edition	Date	Changes
1.0	2020-08-13	Creation
1.1	2020-09-09	Spec adaptation Wavelength Excursion
1.2	2020-09-10	PW typical 1ns
1.3	2020-10-01	Monitor port added
1.4	2020-11-20	Output pigtail 900um without armored Kevlar option
1.5	2021-04-15	Power updated

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

Content

1	Document History	1
2	Product Specification	3
2.1	Overview.....	3
2.2	Functional Description	3
2.2.1	Fiber Laser Module	3
2.2.2	Mechanical Dimension	4
2.3	Technical Specifications	5
2.3.1	Optical Specifications.....	5
2.3.2	Optical Fiber Ports	6
2.3.3	Electrical Specifications	6
2.3.4	Electrical Pinning Description.....	7
2.3.5	Environmental Specification	7
2.3.6	Product Safety and RoHS Conformity	7
3	RS232 Serial Interface Specification	8
3.1	Overview.....	8
4	Applicable Documents.....	8
4.1	Proof of Delivery Quality	8
4.2	Equipment Labeling	9
4.2.1	Sticker Front Side	9
4.2.2	Laser class indication.....	9
4.3	Equipment Packaging	9

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

2 Product Specification


2.1 Overview

The CPFL-Module is a pigtailed, stand alone optical pulsed fiber laser module for integration into custom housings.


2.2 Functional Description

The fiber laser module comprises of laser diodes, optical isolators, WDMs and taps, erbium doped fiber and the micro-processor based controller for stand alone operation. Communication is provided by a serial RS-232 link in the electrical interface.

2.2.1 Fiber Laser Module

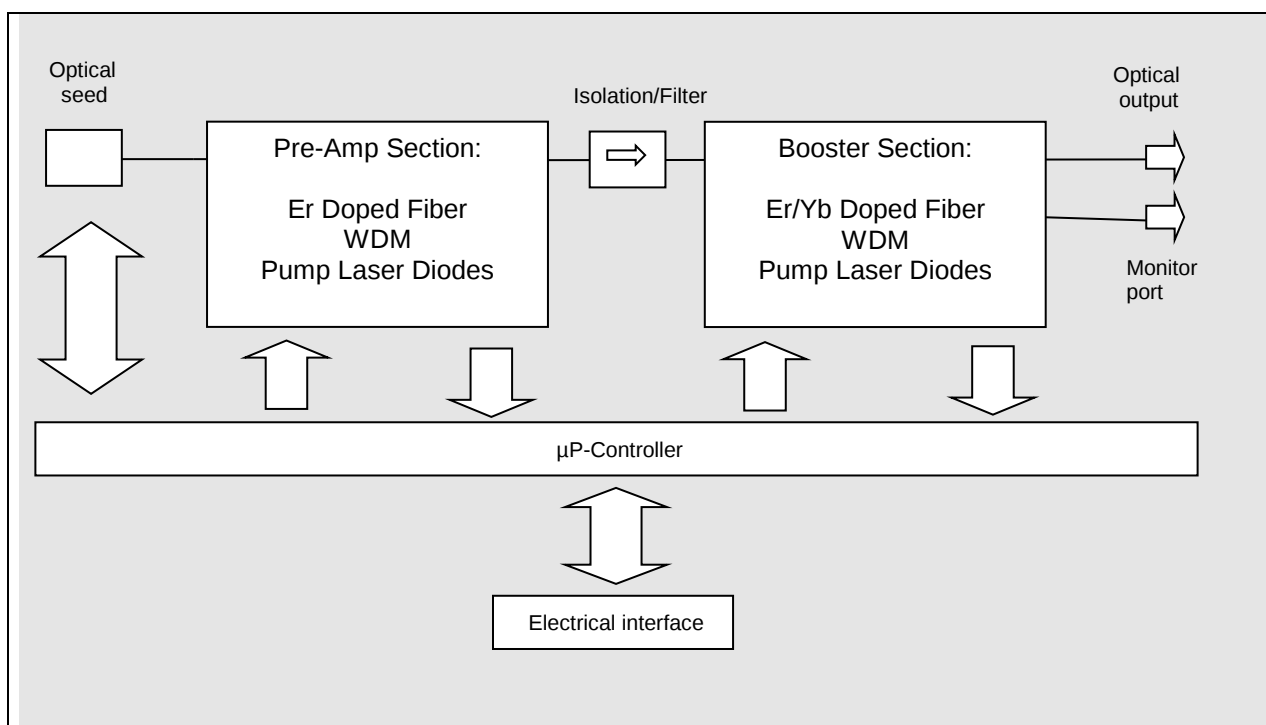

2.2.2 Mechanical Dimension

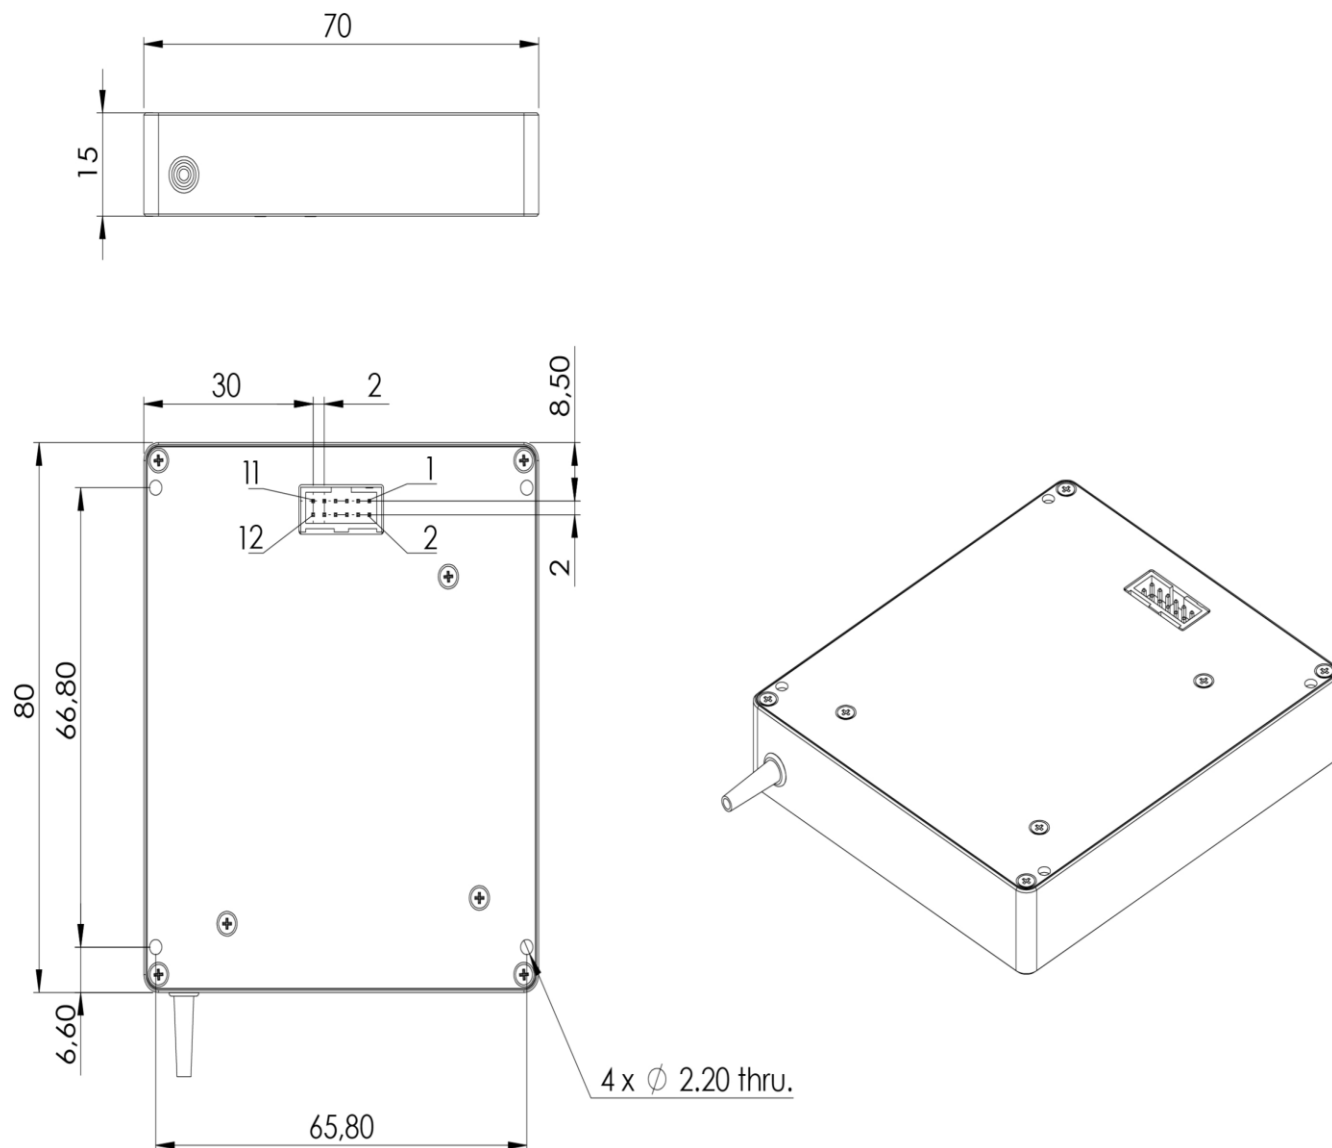

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

2.3 Technical Specifications

2.3.1 Optical Specifications

Optical Performance						
Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Wavelength Band	WB	-	1545.5	1550	1554.5	nm
Wavelength Excursion	WE	Over all operating temperature range		9		nm
Pulse energy	PE	@500kHz		2		uJ
		@100kHz		10	12	uJ
Repetition frequency	RF		100		1000	kHz
Pulse Width	PW			1	1.5	ns
Average Output Power	P-ave	Including ASE		1000	1200	mW
Peak Power	P-peak	@500kHz	1	-	1.8	kW
		@100kHz			11	kW
Output power stability	P-stab	RMS 1 hour @ RT	-	-	4	%
Output power tunability	P-tun		10		100	%
Max allowed back-reflection	BR				-27	dB
Power within Bandwidth		@500kHz BW: 10nm	90			%
Optical Monitor	MON			2		dBm

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

2.3.2 Optical Fiber Ports

Fiber Pigtaills

Single mode 9/125/250 **without** 3mm armored Kevlar (900um pigtail fiber same as monitor pigtail fiber)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Length	Lf	-	45	50	55	cm
Bending radius	R	-	30	-	-	mm
Beam quality	M ²			1.1	1.2	M ²

Connectors Output

FC/ACP (Red)

Connector Monitor

FC/APC (White)

2.3.3 Electrical Specifications

Electrical Conditions

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Power supply voltage	U _{op}		10	12.0	14	V
Power consumption	P _{op}	all conditions	-	13	24	W
Digital Signal Level	-	LVTTL	0	-	3.3	V
Trigger Signal Level	-	LVTTL	0	-	3.3	V

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

2.3.4 Electrical Pinning Description

The electrical connector is SAMTEC ZLTMM-106-65-F-D-328

Pin	Meaning	Remark
1	+12.0 VDC	
2	+12.0 VDC	
3	GND	
4	GND	
5	RS232 Input (LVTTL)	default 9600 Baud
6	RS232 Output (LVTTL)	default 9600 Baud
7	Module Enable Input	active low (Enabled in CC mode)
8	Pump Modulation	Pull-down resistor, LVTTL, active high, (Enabled in CC mode)
9	LVDS-	100 Ohm termination resistor
10	LVDS+	100 Ohm termination resistor
11	Laser Status	active high(Unit is ON), LVTTL output
12	Alarm	active high, LVTTL output

2.3.5 Environmental Specification

Module Environmental Conditions						
Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Storage temperature range	T _{storage}	see note 1	-40	-	85	°C
Case operating temperature range	T _{op}	-	-20	-	65	°C
Humidity	-	non-condensing	-	-	80	%

2.3.6 Product Safety and RoHS Conformity

The module complies with the European low voltage directive 2006/95/EC as elaborated by standard EN 60950-1.

The module complies with the directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS).

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

3 RS232 Serial Interface Specification

3.1 Overview

The CPFL modules are controlled by serial RS232 interface using TTL logic Terminal emulator programs should be used to communicate with the module (e.g. Microsoft Hyper terminal). The CPFL modules use the following terminal interface parameters:

Terminal Parameter	Setting	Unit
Baud rate	9600	Baud
Data bits	8	Bits
Parity	None	
Stop bits	1	Bit
Flow control	None	

The command list is described in detail in a separate document:

4 Applicable Documents

4.1 Proof of Delivery Quality

An individual test report is delivered for each module with detailed measurements including:

- Module serial number

- 1) Pump current parameter VS Average Power
- 2) Pulse to pulse jitter @ 500kHz
- 3) Trigger(external) to pulse(optical out) delay and jitter @500kHz
- 4) Peak power @ 1nsec pulse duration, 500kHz pulse repetition freq.
- 5) Temperature VS Central Wavelength

 BKtel	Technical Requirement Specification Fiber Laser Module CPFL-300am-FCAPC-FCAPC	Id.- No.: 420300 Rev.: 1.5 Date: 2021-04-15
--	--	--

4.2 Equipment Labeling

4.2.1 Sticker Front Side

- Color: White
- Printed or fixed on center of top plate

4.2.2 Laser class indication

- The module is labelled as laser class 4 product

4.3 Equipment Packaging

Each device will be supplied in single packaging. The packaging is safe against transport damages and protects particularly the pigtails and the connectors. On the packaging a label with the indication of BKtel type is to be applied on the front face.