



808nm 300mW VCSEL Diode

LD0808-B300-0025CA-XXXX

Features

- 808nm single wavelength
- Low wavelength drift
- Oxide isolation technology
- Low threshold current
- Small emission area
- Easy to collimate

Application


- 3D sensors
- Lidars
- IR illuminations
- Medical applications
- Solid-state pump source

PRODUCT IDENTIFY

Part Number	Description
LD0808-B300-0025CA-XXXX	808nm 300mW VCSEL Diode

CODE RULES

e.g. LD0808 – B300 – 0025 CA – XXXX

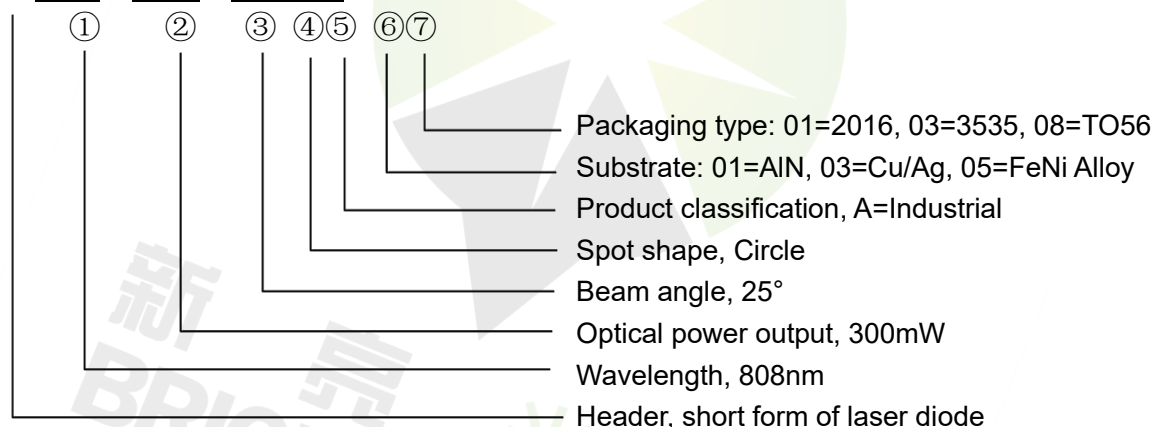

I. Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Case Operating Temp	Top	-40 to 85	°C
Storage Temp	Tsto	-40 to 105	°C
Reflow Soldering Temperature	Tsdr	260°C(10s)	°C
Reverse Voltage	Vr	5	V
Maximum Pulsed Current	Imax	0.75	A
ESD exposure (Human body) model	ESD	2K	V

Note:

- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions above those indicated in the operations section for extended periods of time may affect reliability.
- In its maximum rating diode laser operation could damage its performance or cause potential safety hazard

Hong Kong

+852-2325 1708 sales@brightlaser.com.hk
 Unit 215, 2/F, 16W, Phase III, Hong Kong Science Park, Hong Kong

Shenzhen

0755-8632 9377 szsales@brightlaser.com.hk
 Unit 1007, 10/F, Microprofit Tower, No.6 Gaoxin South Road, Nanshan district, Shenzhen

Zhongshan

0760-8533 8588 szsales02@brightlaser.com.hk
 No.32-3 East Dongzhen Road, National Torch High tech Industrial Development Zone, Zhongshan



such as equipment failure.



- Electrostatic discharge is the main reason for the laser fault of the diode. Take effective precautions against ESD. When dealing with laser diodes, use the wrist strap, grounding work surface and strict antistatic technology.

II. Optical-electrical characteristics @25°C (pulsewidth 0.1ms, 1% duty cycle)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Optical Power Output	P _o	I _F =0.5A	-	300	350	mW
Threshold Current	I _{th}	-	-	0.15	-	A
Forward Current	-	-	-	0.5	-	A
Slope Efficiency	-	-	-	0.8	-	mW/mA
Power Conversion Efficiency	η	I _F =0.5A	-	29	-	%
Peak Wavelength	λ _P	P _o =300mW	800	808	816	nm
Laser Forward Voltage	V _F	I _F =0.5A	-	2.51	-	V
Series Resistance	R _S	I _F =0.5A	-	4.8	-	Ω
Emission area	-	-	-	294*278	-	um
Beam Angle	(1/e ²)	θ	I _F =0.5A	25	-	Degrees
	FWHM	θ	I _F =0.5A			
Wavelength Temp. Drift	∂λ _P /∂T	I _F =0.5A	-	0.07	-	nm/°C
Soldering Temperature	-	AlN	-	-	260(10s)	°C
	-	FeNi Alloy	-	-	180(10s)	°C
Substrate	AlN, Cu/Ag, FeNi Alloy					

Note: Electro-Optical Characteristic with a package or diffuser would require further evaluation. Values are based on limited sample size and estimated values.

III. LIV Graph and Wavelength

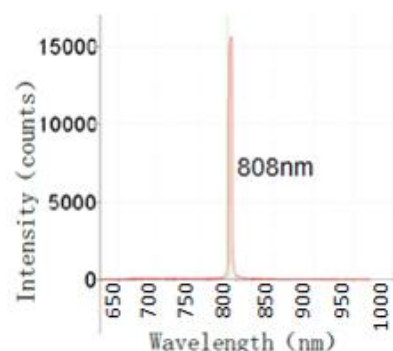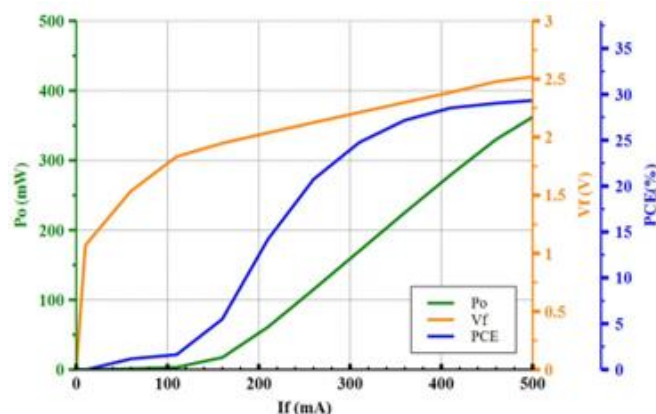

Hong Kong

☎ +852-2325 1708 ✉ sales@brightlaser.com.hk
 📍 Unit 215, 2/F, 16W, Phase III, Hong Kong Science Park, Hong Kong

Shenzhen

☎ 0755-8632 9377 ✉ szsales@brightlaser.com.hk
 📍 Unit 1007, 10/F, Microprofit Tower, No.6 Gaoxin South Road, Nanshan district, Shenzhen

Zhongshan

☎ 0760-8533 8588 ✉ szsales02@brightlaser.com.hk
 📍 No.32-3 East Dongzhen Road, National Torch High tech Industrial Development Zone, Zhongshan




Note:


1. LIV graph was measured at 25 °C (left), power output, voltage and power conversion efficiency variation trend with changed operating temperature (right, normalized).
2. Forward Voltage (VF) measurement allowance is ± 0.1 V.
3. Peak Wavelength (λ_P) measurement allowance is ± 1.5 nm.
4. Others measurement allowance is $\pm 10\%$.

IV. Mechanical Schematics (unit: mm)

LD0808-B300-0025CA-0101 (Substrate AlN, Package 2016)

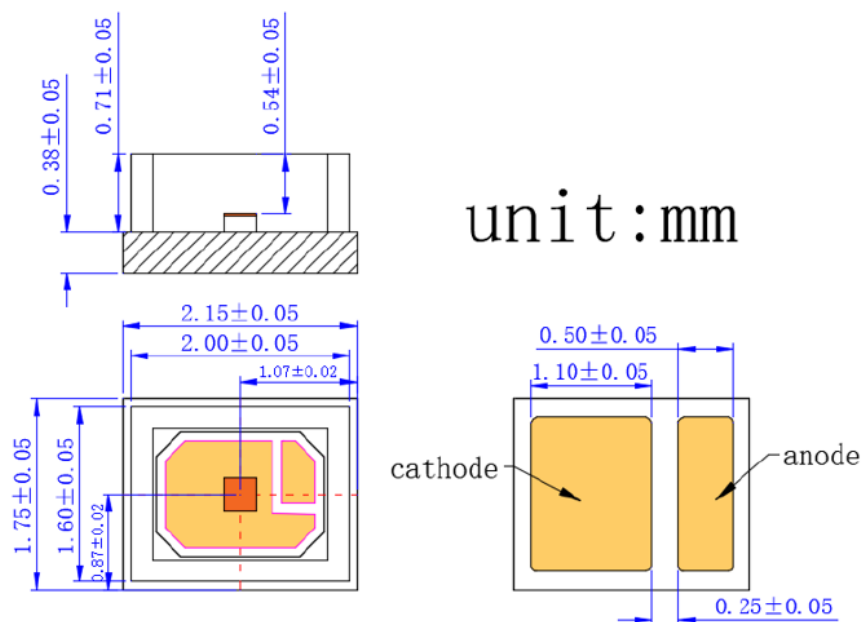

LD0808-B300-0025CA-0301 (Substrate Cu/Ag, Package 2016)

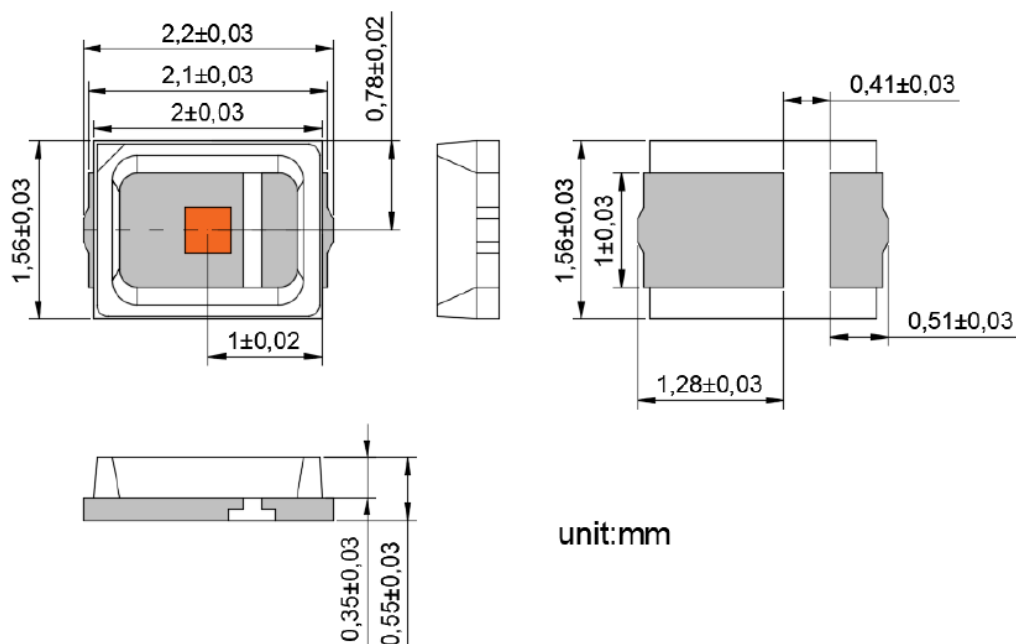

Hong Kong

+852-2325 1708 sales@brightlaser.com.hk
 Unit 215, 2/F, 16W, Phase III, Hong Kong Science Park, Hong Kong

Shenzhen


0755-8632 9377 szsales@brightlaser.com.hk
 Unit 1007, 10/F, Microprofit Tower, No.6 Gaoxin South Road, Nanshan district, Shenzhen

Zhongshan


0760-8533 8588 szsales02@brightlaser.com.hk
 No.32-3 East Dongzhen Road, National Torch High tech Industrial Development Zone, Zhongshan



LD0808-B300-0025CA-0103 (Substrate AlN, Package 3535)

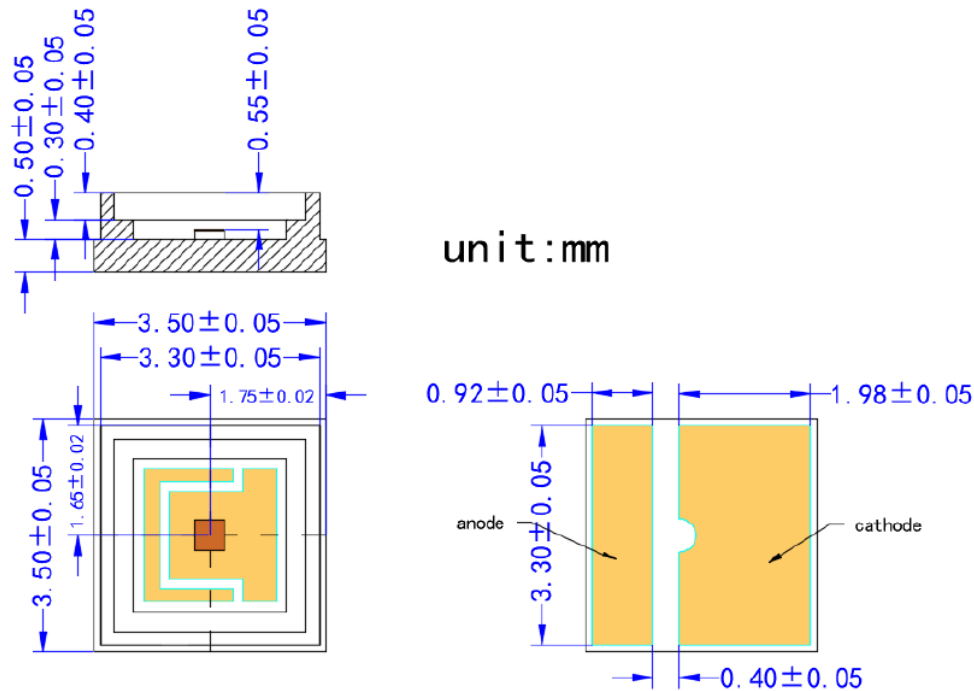

LD0808-B300-0025CA-0303 (Substrate Cu/Ag, Package 3535)

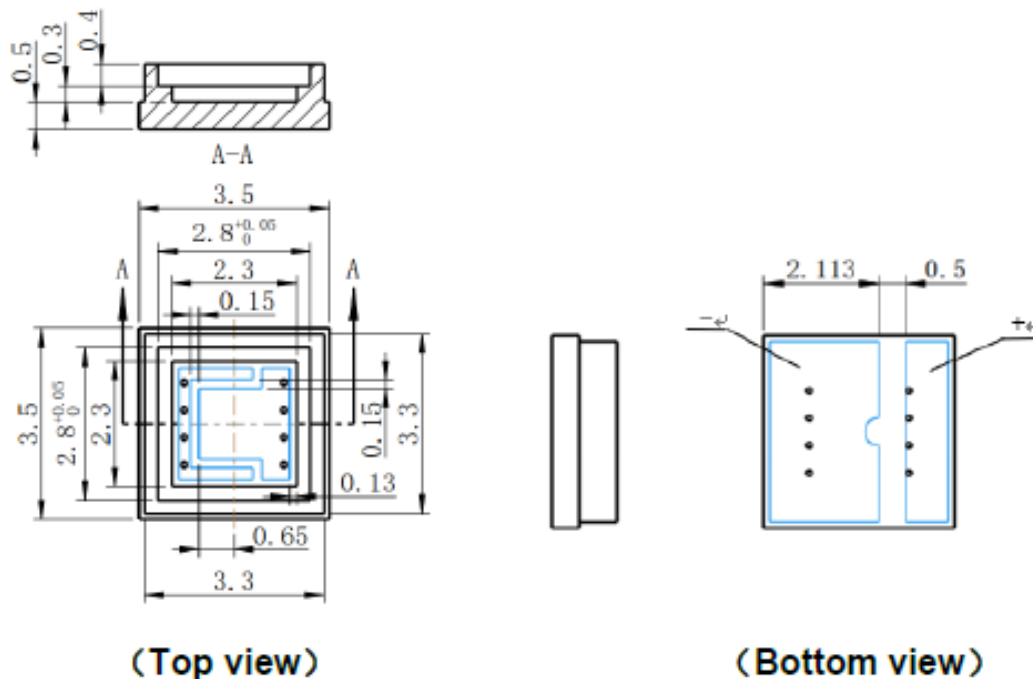

Hong Kong

☎ +852-2325 1708 ✉ sales@brightlaser.com.hk
📍 Unit 215, 2/F, 16W, Phase III, Hong Kong Science Park, Hong Kong

Shenzhen


☎ 0755-8632 9377 ✉ szsales@brightlaser.com.hk
📍 Unit 1007, 10/F, Microprofit Tower, No.6 Gaoxin South Road, Nanshan district, Shenzhen

Zhongshan

☎ 0760-8533 8588 ✉ szsales02@brightlaser.com.hk
📍 No.32-3 East Dongzhen Road, National Torch High tech Industrial Development Zone, Zhongshan




LD0808-B300-0025CA-0508 (Substrate FeNi Alloy, Package TO56)

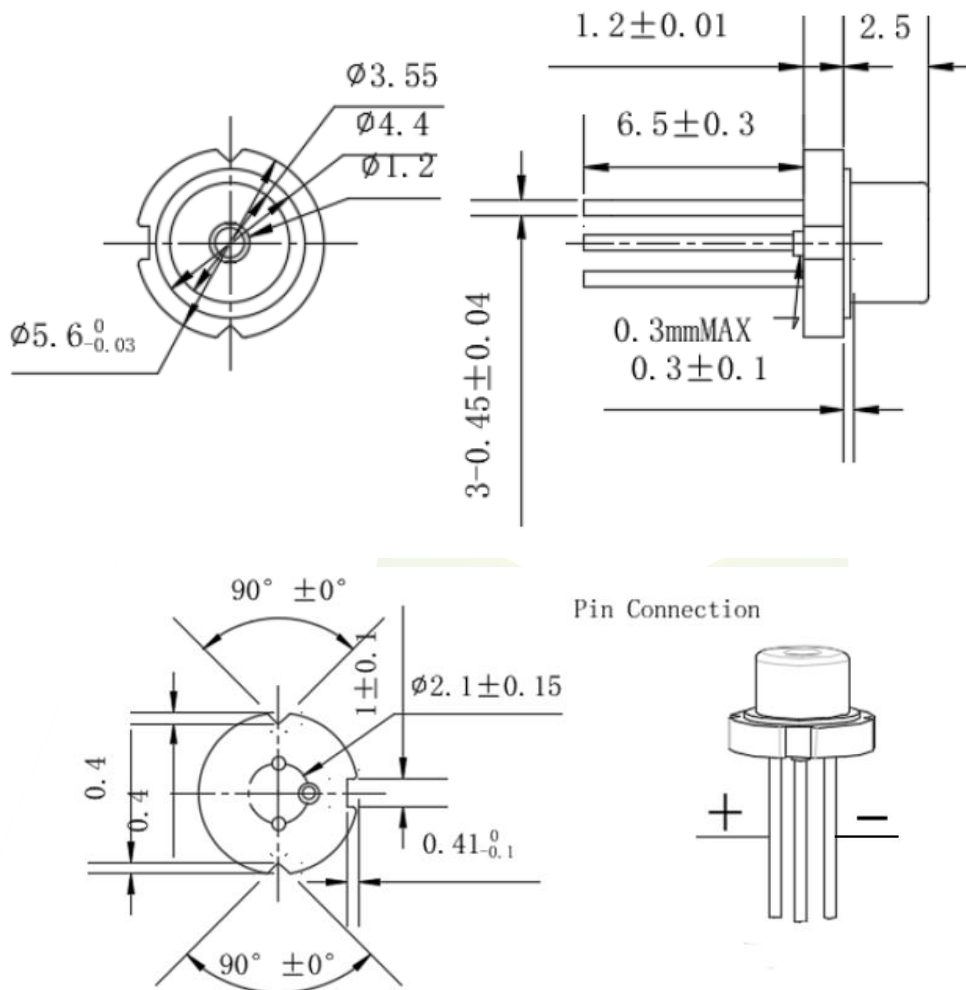

Note: There may be some changes between sample and drawing, thus, the actual spec please refer to the sample that you received. And if any question please contact us.

V. SMT reflow soldering curve

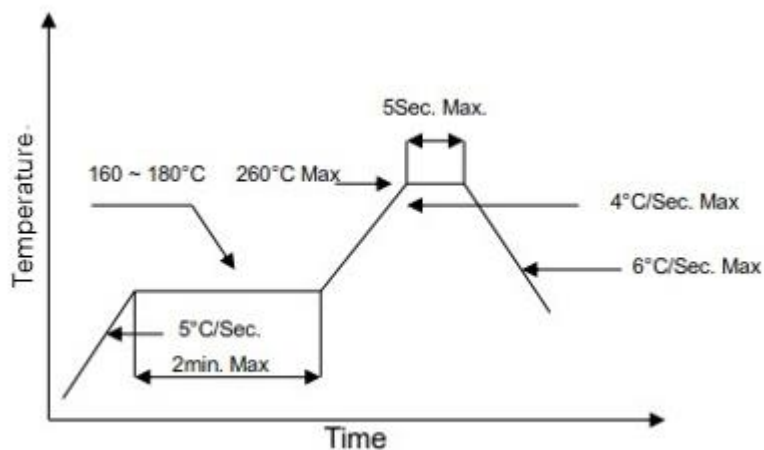

Hong Kong

+852-2325 1708 sales@brightlaser.com.hk
 Unit 215, 2/F, 16W, Phase III, Hong Kong Science Park, Hong Kong

Shenzhen

0755-8632 9377 szsales@brightlaser.com.hk
 Unit 1007, 10/F, Microprofit Tower, No.6 Gaoxin South Road, Nanshan district, Shenzhen

Zhongshan

0760-8533 8588 szsales02@brightlaser.com.hk
 No.32-3 East Dongzhen Road, National Torch High tech Industrial Development Zone, Zhongshan



Note: Reflow soldering can be operated only one time. During the temperature ramp-up, no forces may be exerted on the LD which could deform or damage them. After soldering completed, please also do not process until the product temperature ramp down to room temperature.

VI. Treatment and protection measures

Soldering precautions

For AlN and FeNi Alloy substrate, the temperature of soldering iron must be controlled under 260°C during manual soldering; For Cu/Ag substrate, the temperature of soldering iron must be controlled under 180°C during manual soldering. Also, VCSEL can be only soldered one time with the soldering time less than 3s. But, It is very hard to control the soldering temperature and homogenize solder paste because of the smaller size of VCSEL. In addition, it is easy to damage VCSEL structure even causes VCSEL losing efficacy. So, we advise you to use re-flow soldering machine for operation.

Storage precautions

Our products were sealed by aluminum foil bag attaching packed desiccant, they are moisture proof and anti-static. please handle these gently to avoid damage. At the same time, please be ready for storage and take some moisture-proof measures to keep VCSEL away from dampness that may causes reliability failure.

Before opening, VCSEL must be saved for at least 90 days below 30°C with 60%RH.

After opening, VCSEL must be kept in an environment that temperature lower than 30°C and humidity lower than 60%RH and used up within 24 hours. When the storage humidity reaches and exceeds 60%, the products must be dehumidified at 60°C for more than 24hours before use.

Others

1. Please use solder paste to cure the laser diode.
2. Please make sure that the heat of LD has been completely conducted to metal shell, to avoid affecting the optical power output.
3. This LD can be only used in constant voltage and current.
4. Operating voltage and current, refer to the table in paragraph II.
5. Please do not aim the laser to people or animal.
6. You can observe the laser spot through an image monitoring equipment.
7. Please do not touch LD surface by naked hands or squeeze the sealant on LD surface, or it may cause wrong optical angle and distorted laser spot, even damage the LD.
8. Please use ceramic suction nozzle to absorb the LD, so as to avoid LD sticking to the nozzle.
9. Please add a 0.02s blowing action after locating the laser diode to aluminum substrate.

Hong Kong

☎ +852-2325 1708 ✉ sales@brightlaser.com.hk
📍 Unit 215, 2/F, 16W, Phase III, Hong Kong Science Park, Hong Kong

Shenzhen

☎ 0755-8632 9377 ✉ szsales@brightlaser.com.hk
📍 Unit 1007, 10/F, Microprofit Tower, No.6 Gaoxin South Road, Nanshan district, Shenzhen

Zhongshan

☎ 0760-8533 8588 ✉ szsales02@brightlaser.com.hk
📍 No.32-3 East Dongzhen Road, National Torch High tech Industrial Development Zone, Zhongshan



VII. Revision history

Revision	Date	Description
V.01	2020/08/10	The first official edition
V.02	2020/11/21	Update package type

**BrightPhoton reserves the right to make modification at any time due to improved design from time to time, the merit behind is in order to supply the best product possible.



新亮光子
BRIGHTPHOTON

Hong Kong

☎ +852-2325 1708 ✉ sales@brightlaser.com.hk
📍 Unit 215, 2/F, 16W, Phase III, Hong Kong Science Park, Hong Kong

Shenzhen

☎ 0755-8632 9377 ✉ szsales@brightlaser.com.hk
📍 Unit 1007, 10/F, Microprofit Tower, No.6 Gaoxin South Road, Nanshan district, Shenzhen

Zhongshan

☎ 0760-8533 8588 ✉ szsales02@brightlaser.com.hk
📍 No.32-3 East Dongzhen Road, National Torch High tech Industrial Development Zone, Zhongshan