

EPIGAP Optronik GmbH

Koepenicker Str. 325
D-12555 Berlin
Fon: +49 (0)30 657637 60
Fax: +49 (0)30 657637 70
sales@epigap-optronic.de



Data sheet

Preliminary

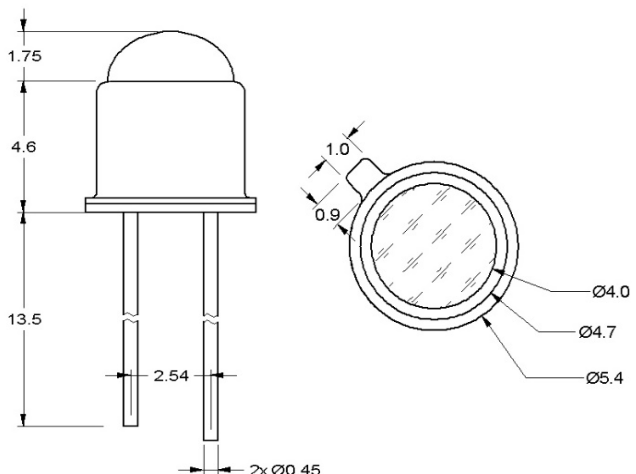
page 1 of 4

UV LED

EOLD-255-012

Rev. 02, 2020

Radiation	Type	Case
Ultraviolet (UVC)	AlGaIn	TO-46 with lens cap

 Short pin - cathode, isolated, long pin - anode, case Dimensions in mm	Description:
	High radiant power, narrow beam angle, high reliability in demanding environments, with integrated protective Zener diode
	Applications:
	- Analytical instruments: biochemical, medical, and scientific analysis - Photo catalyst - Medical phototherapy - UV curing: spot bonding, printing, film coating and general purpose

Maximum Ratings

T_{amb} = 25°C, unless otherwise specified

Parameter	Test Conditions	Symbol	Value	Unit
Forward current		I _F	20	mA
Peak forward current	tbd	I _{FM}	100	mA
Reverse voltage*		V _R		V
Power dissipation		P _D	190	mW
Operating temperature range		T _{amb}	-20 to +85	°C
Storage temperature range		T _{stg}	-30 to +100	°C
Lead soldering temperature	< 5 s, 3 mm from case	T _{slg}	260	°C

*LEDs should never be operated with reverse bias.



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

Data sheet**Preliminary**

page 2 of 4

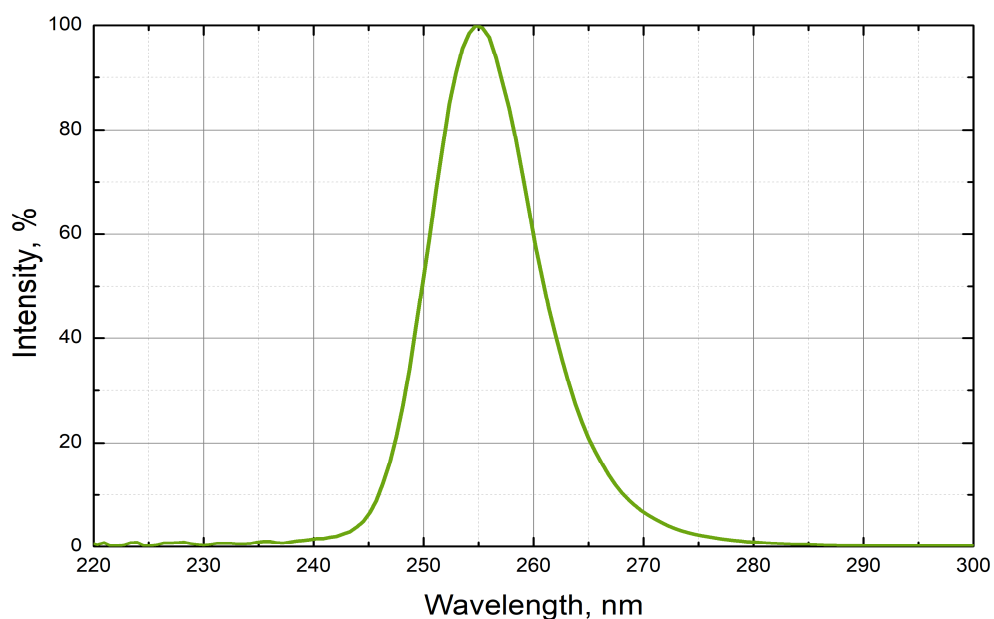
UV LED**EOLD-255-012**

Rev. 02, 2020

Optical and Electrical Characteristics $T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F = 20\text{ mA}$		5.8		V
Forward voltage**	V_F	$I_F = 100\text{ mA}$		6.2		V
Radiant power	Φ_e	$I_F = 20\text{ mA}$		1.0		mW
Peak wavelength	λ_p	$I_F = 20\text{ mA}$	250	255	260	nm
FWHM	$\Delta\lambda_{0.5}$	$I_F = 20\text{ mA}$		11		nm
Viewing angle	φ	$I_F = 20\text{ mA}$		6		deg.

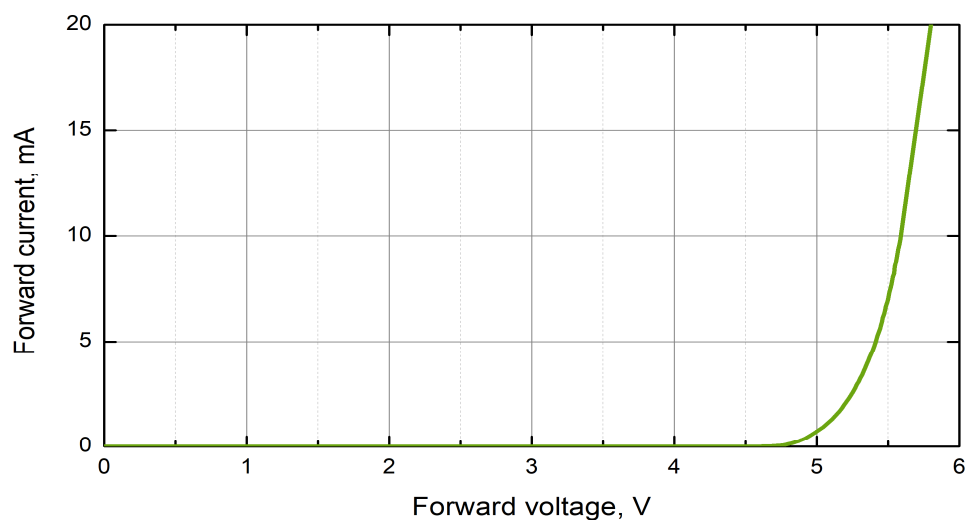
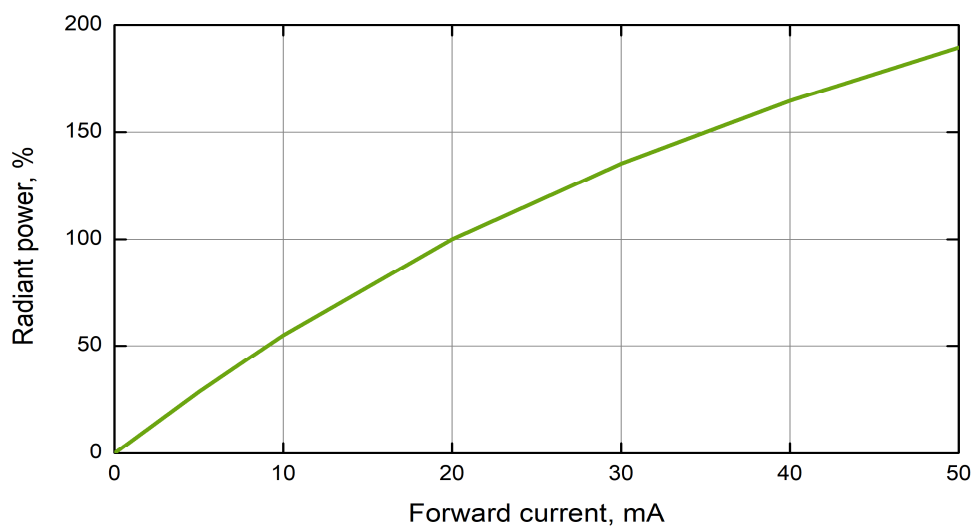
**In pulse mode, for reference only

**Spectrum @ 20 mA**

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.

Data sheet**Preliminary****page 3 of 4****UV LED****EOLD-255-012**

Rev. 02, 2020

**Forward current vs. forward voltage****Radiant power vs. forward current**

EPIGAP Optronic GmbH

Koepenicker Str. 325

D-12555 Berlin

Fon: +49 (0)30 657637 60

Fax: +49 (0)30 657637 70

sales@epigap-optronic.de



Data sheet

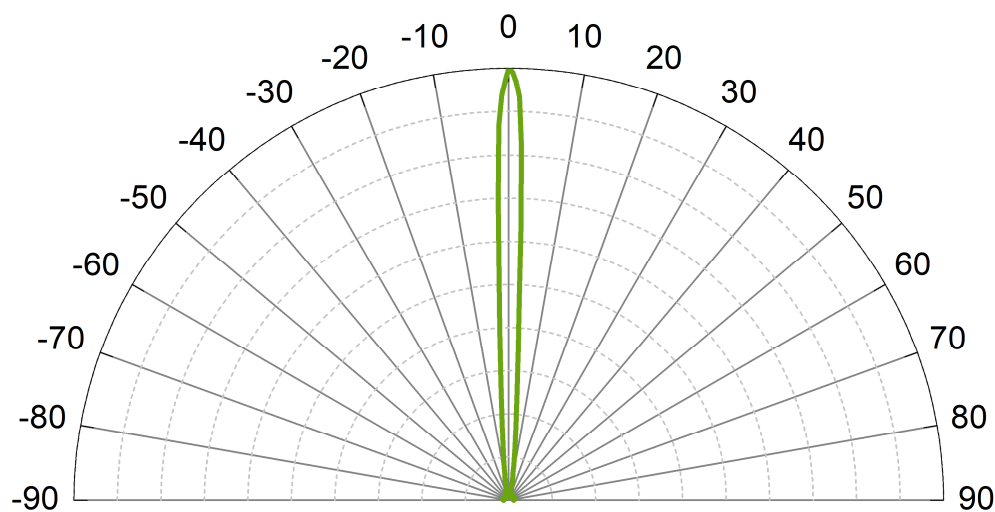
Preliminary

page 4 of 4

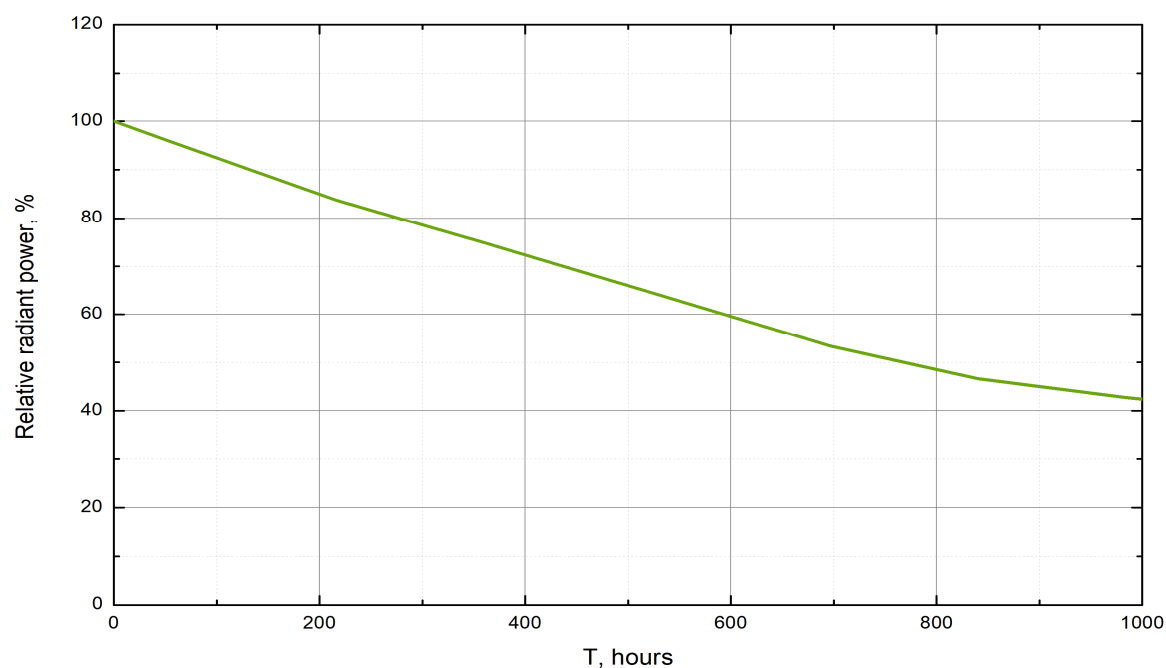
UV LED

EOLD-255-012

Rev. 02, 2020



Radiation pattern



Life test @ 20 mA

Art. No. 134 008



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.